





## R PNEUJET FILTERS (ROUND)

KICE INDUSTRIES, INC. / 5500 Mill Heights Drive / Wichita, KS 67219


www.kice.com / sales@kice.com

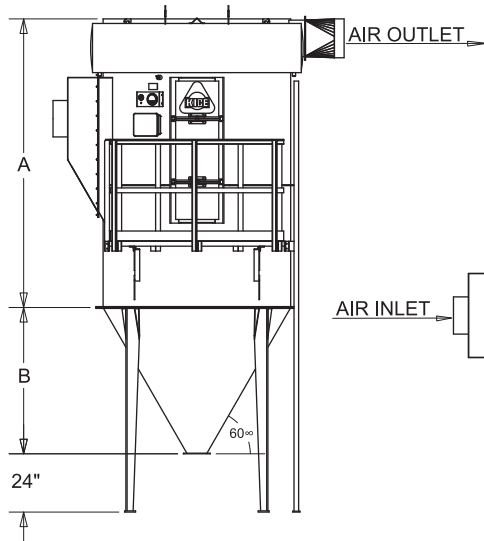

FRONT VIEW

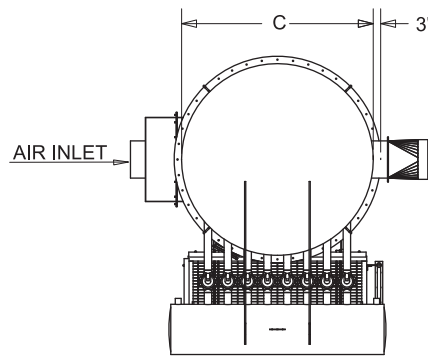

TOP VIEW

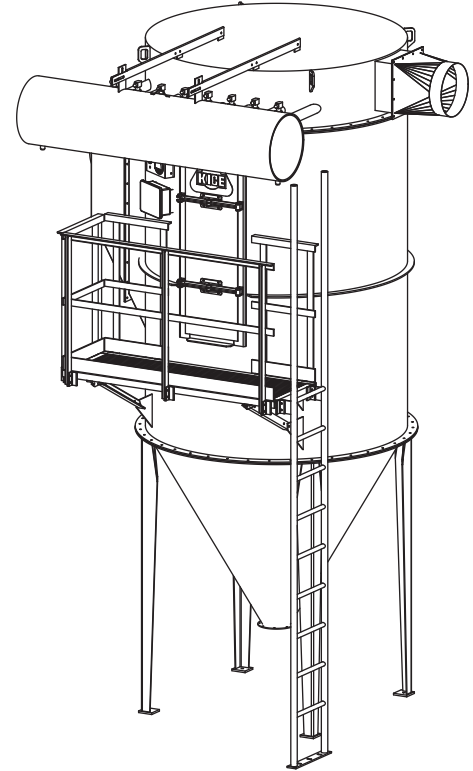

| MODEL # | FILTER AREA <sup>2</sup> | A   | B      | C      | EST. WEIGHT |
|---------|--------------------------|-----|--------|--------|-------------|
| R 16-4  | 75                       | 71  | 29 3/4 | 42     | 1600        |
| R 21-4  | 99                       | 71  | 31 1/2 | 44     | 1750        |
| R 32-4  | 151                      | 71  | 41     | 55     | 2250        |
| R 45-4  | 212                      | 71  | 50 1/2 | 66 1/4 | 2850        |
| R 16-6  | 113                      | 95  | 29 3/4 | 42     | 2300        |
| R 21-6  | 148                      | 95  | 31 1/2 | 44     | 2400        |
| R 32-6  | 226                      | 95  | 41     | 55     | 3150        |
| R 45-6  | 318                      | 95  | 50 1/2 | 66 1/4 | 3800        |
| R 60-6  | 424                      | 95  | 60 1/4 | 77 1/4 | 4550        |
| R 77-6  | 544                      | 95  | 69 3/4 | 88 1/4 | 5450        |
| R 88-6  | 622                      | 95  | 71 1/2 | 90 1/4 | 5550        |
| R 96-6  | 679                      | 95  | 79 1/4 | 99 1/4 | 6200        |
| R 16-8  | 151                      | 119 | 29 3/4 | 42     | 2450        |
| R 21-8  | 198                      | 119 | 31 1/2 | 44     | 2600        |
| R 32-8  | 302                      | 119 | 41     | 55     | 3350        |
| R 45-8  | 424                      | 119 | 50 1/2 | 66 1/4 | 4050        |
| R 60-8  | 565                      | 119 | 60 1/4 | 77 1/4 | 4950        |
| R 77-8  | 726                      | 119 | 69 3/4 | 88 1/4 | 5900        |
| R 88-8  | 829                      | 119 | 71 1/2 | 90 1/4 | 6100        |
| R 96-8  | 905                      | 143 | 79 1/4 | 99 1/4 | 6750        |
| R 16-10 | 188                      | 143 | 29 3/4 | 42     | 2650        |
| R 21-10 | 247                      | 143 | 31 1/2 | 44     | 2750        |
| R 32-10 | 377                      | 143 | 41     | 55     | 3600        |
| R 45-10 | 530                      | 143 | 50 1/2 | 66 1/4 | 4350        |
| R 60-10 | 707                      | 143 | 60 1/4 | 77 1/4 | 5350        |
| R 77-10 | 907                      | 143 | 69 3/4 | 88 1/4 | 6250        |
| R 88-10 | 1037                     | 143 | 71 1/2 | 90 1/4 | 6600        |
| R 96-10 | 1131                     | 143 | 79 1/4 | 99 1/4 | 7250        |

### NOTES:

RECOMMENDED AIR VOLUMES DEPEND ON SEVERAL APPLICATION FACTORS. IN GENERAL, A RATIO OF 10 CFM PER SQUARE FEET OF FILTER AREA CAN BE USED. FOR FINE DUST, HIGH MOISTURE OR OTHER DIFFICULT APPLICATIONS, A LOWER RATIO WILL BE REQUIRED

MATERIALS OF CONSTRUCTION SPECIFIED ON PROPOSAL

OPTIONAL EXTERIOR WALKWAY AND LADDERS SHOWN

APPROVAL DRAWINGS TO BE SUBMITTED UPON RECEIPT OF ORDER

60 DEGREE HOPPER SHOWN  
70 DEGREE HOPPER AVAILABLE