



Kice Air Power Unit Replacement Filters

*For Kice FMG, FMI, and IFS Inlet Filter Assemblies

NEW

High Efficiency (HEPA) Filter Replacements

Features

- Pleated ULPA filter media for high dust loading capacity
- Stainless Steel perforated inner core and end caps
- Polypropylene mesh outer core
- Constructed from food safe materials
- Sized to minimize pressure drop

Technical Specifications

- Filter efficiency: 99.99% at 0.3 micron
- Max Operating Temp: 185 °F (85 °C)



Standard Foam Filter Replacements


Features

- Open cell polyurethane foam
- Dual layer foam acts as a pre-filter extending filter life

Technical Specifications

- Filter efficiency: 99% at 3 micron
- Max Operating Temp: 194 °F (90 °C)



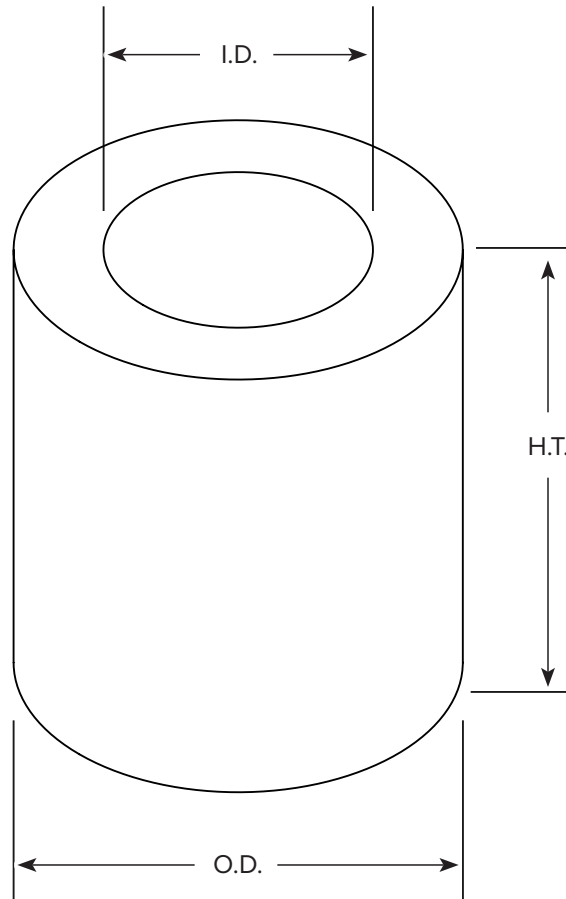

Part Number	Type	Inlet Filter Size	Air Flow (CFM)	Pressure Drop (in WC)	O.D.	I.D.	H.T.
100-138-745	HEPA	FMG, FMI, or IFS 3 & 4	400	3	10	6	11.25
100-138-746	HEPA	FMG, FMI, or IFS 5 & 6	900	6	18	11.5	11.25
1-1156-02	Foam	FMG, FMI, or IFS 2 & 2 1/2	250	3	9.5	6	6.25
1-1156-03	Foam	FMG, FMI, or IFS 3 & 4	400	3	9.5	6	12.5
1-1156-04	Foam	FMG, FMI, or IFS 5 & 6	900	5	16	11.5	12.5
1-1156-05	Foam	FMG 8	1700	6	16	11.5	24

For questions or additional assistance, please contact the Customer Service Department or Quick Ship Department.

Kice Industries, Inc.
 5500 Mill Heights Drive
 Park City, KS 67219-2358
 Toll Free: (877) 289-5423
 Main Phone: (316) 744-7151
 Email: quickship@kice.com
 Fax: (316) 744-7355
 www.kice.com

