

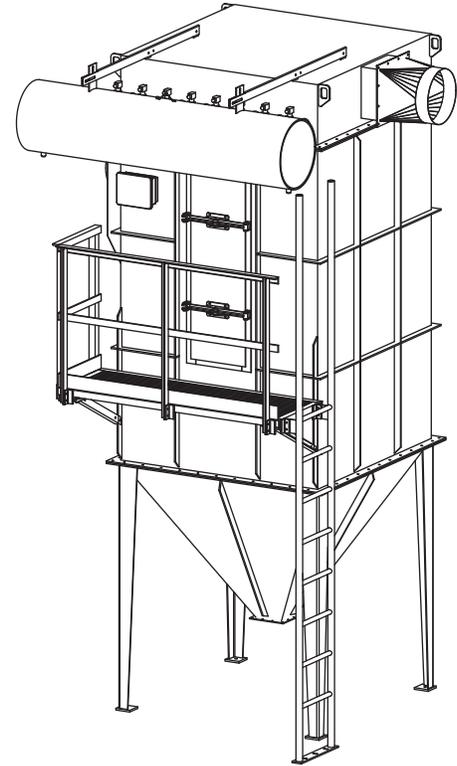


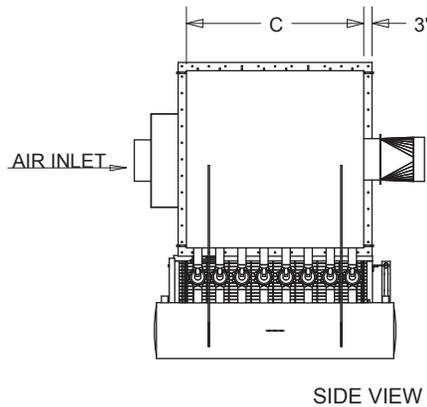

S PNEUJET FILTERS

KICE INDUSTRIES, INC. / 5500 Mill Heights Drive / Park City, KS 67219 www.kice.com / sales@kice.com

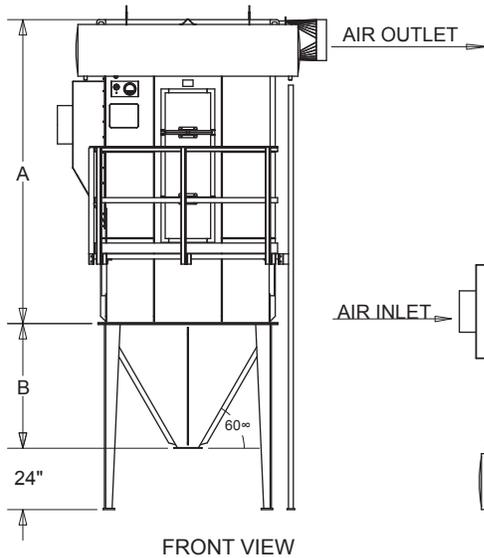

MODEL #	FILTER AREA ²	A	B	C	EST. WEIGHT
S 16-4	75	71	21	32 1/4	1250
S 25-4	118	71	28	40 1/4	1550
S 36-4	170	71	34 3/4	48 1/4	1850
S 49-4	231	71	42	56 1/4	2250
S 16-6	113	95	21	32 1/4	1800
S 25-6	177	95	28	40 1/4	2200
S 36-6	254	95	34 3/4	48 1/4	2600
S 49-6	346	95	42	56 1/4	3100
S 64-6	452	95	48 3/4	64 1/4	3600
S 81-6	573	95	55 1/2	72 1/4	4250
S 100-6	707	95	62 1/2	80 1/4	4900
S 16-8	151	119	21	32 1/4	2000
S 25-8	236	119	28	40 1/4	2400
S 36-8	339	119	34 3/4	48 1/4	2900
S 49-8	462	119	42	56 1/4	3400
S 64-8	603	119	48 3/4	64 1/4	4000
S 81-8	763	119	55 1/2	72 1/4	4700
S 100-8	942	119	62 1/2	80 1/4	5400
S 121-8	1140	119	69	88 1/4	7200
S 16-10	188	143	21	32 1/4	2200
S 25-10	295	143	28	40 1/4	2600
S 36-10	424	143	34 3/4	48 1/4	3150
S 49-10	577	143	42	56 1/4	3700
S 64-10	754	143	48 3/4	64 1/4	4350
S 81-10	954	143	55 1/2	72 1/4	5150
S 100-10	1178	143	62 1/2	80 1/4	5850
S 121-10	1425	143	69	88 1/4	7650

NOTES:

RECOMMENDED AIR VOLUMES DEPEND ON SEVERAL APPLICATION FACTORS. IN GENERAL, A RATIO OF 10 CFM PER SQUARE FEET OF FILTER AREA CAN BE USED. FOR FINE DUST, HIGH MOISTURE OR OTHER DIFFICULT APPLICATIONS, A LOWER RATIO WILL BE REQUIRED

MATERIALS OF CONSTRUCTION SPECIFIED ON PROPOSAL

EXTERIOR WALKWAY SHOWN IS OPTIONAL

APPROVAL DRAWINGS TO BE SUBMITTED UPON RECEIPT OF ORDER

60 DEGREE HOPPER SHOWN
70 DEGREE HOPPER AVAILABLE